

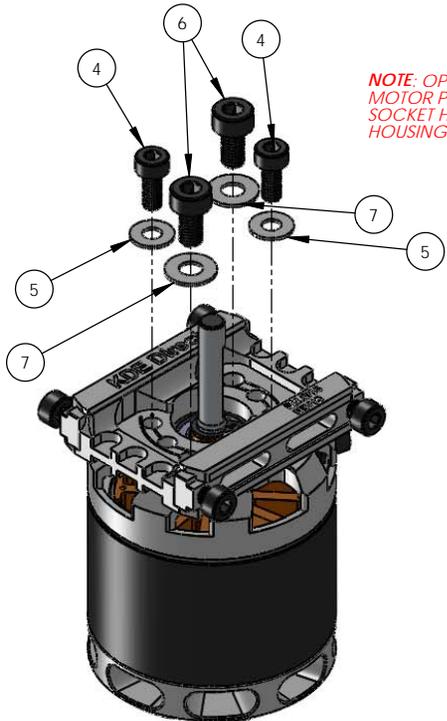
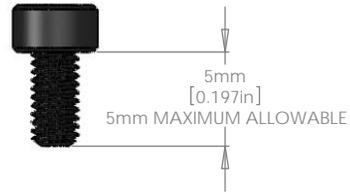


TREX450PRO UNIVERSAL MOTOR MOUNT AT450P-UMM (AL 6061-T6)

NOTE: FOR PROPER INSTALLATION OF THE SIDE RAILS, A MAXIMUM SCREW LENGTH OF 5MM IS ALLOWED FOR THE MOTOR MOUNT. APPROPRIATE M2.5 x 0.45 x 5MM FASTENERS HAVE BEEN PROVIDED FOR CORRECT INSTALLATION.

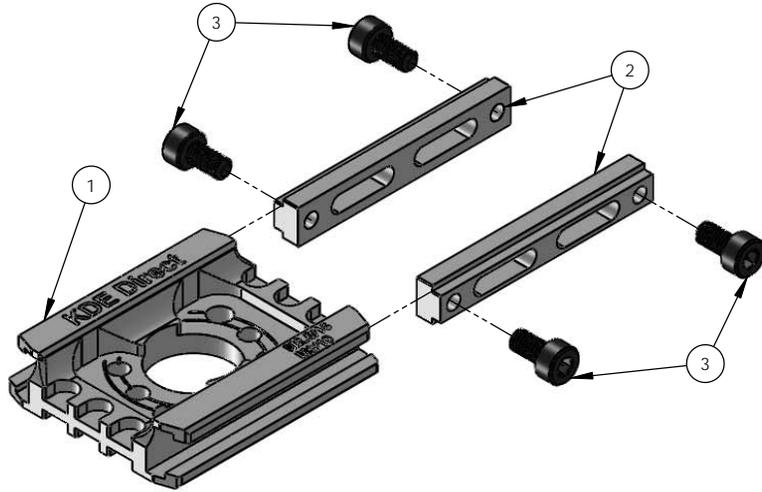


NOTE: OPTIONAL KDE DIRECT 450XF-3500 HP BRUSHLESS MOTOR PROVIDES ABILITY FOR DUAL M2.5 AND M3 SOCKET HEAD CAP SCREW ATTACHMENT TO THE MOTOR HOUSING FOR ULTIMATE STRENGTH AND SECURITY

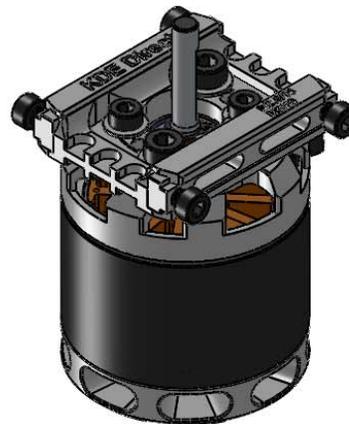

ITEM NO.	DESCRIPTION	QTY.
1	TREX 450 PRO SERIES UNIVERSAL MOTOR MOUNT PLATE	1
2	TREX 450 PRO SERIES UNIVERSAL MOTOR MOUNT RAIL	2
3	M2.5 x 0.45 x 5MM SOCKET HEAD CAP SCREW	4
4	M2.5 x 0.45 x 6MM SOCKET HEAD CAP SCREW (PROVIDED IN ORIGINAL KIT)	2
5	M2.5 FLAT WASHER (PROVIDED IN ORIGINAL KIT)	2
6	M3 x 0.5 x 6MM SOCKET HEAD CAP SCREW	2
7	M3 FLAT WASHER	2
8	KDE DIRECT 450XF-3500 HP BRUSHLESS MOTOR, 3500kv (SHOWN FOR REFERENCE, SOLD SEPARATELY)	1

NOTE: THE UNIVERSAL MOTOR MOUNT COMPONENTS HAVE BEEN CNC MACHINED TO PRECISE TOLERANCES FOR ACCURATE ALIGNMENT AND PROPER OPERATION. DUE TO THE TIGHT TOLERANCES (TO PREVENT SLOP WITHIN THE MOUNT INTERFACE), SLIGHT BINDING MAY OCCUR DURING THE FULL RANGE OF ADJUSTMENT. IF BINDING OCCURS, A PIECE OF HIGH-GRIT SANDPAPER (400 GRIT OR HIGHER) CAN BE USED TO SMOOTH THE MOTOR MOUNT RAILS. THIS WILL REMOVE EXCESS CHROMATE COATING AND PROVIDE A SMOOTH, SLOP-FREE MOUNT FOR THE UPGRADE.

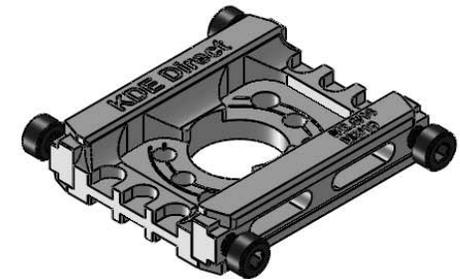

www.KDEDirect.com
AT450P-UMM